

# TENDER

FOR

Name of the work: \_\_\_\_\_

At: Head Office, Bhubaneswar

Sold to M/s.....



**The Odisha Agro Industries Corporation Ltd.,**

**(A Govt. of Odisha Undertaking)**

**Regd. Head Office:95, Satyanagar, Bhubaneswar-751 007**

**Tel: (0674) 2570687, EPBX: 2570654, FAX 2570313, Email: oaicho@orissuagro.com**

## SHORT TENDER CALL NOTICE

FOR

### "Construction of Decorative Main Gate - Entrance"

at Head Office (Campus), Bhubaneswar



THE ODISHA AGRO INDUSTRIES CORPORATION LIMITED  
(A Government of Odisha Undertaking)  
95, SATYA NAGAR, BHUBANESWAR – 751 007.

#### **SHORT TENDER CALL NOTICE**

Sealed quotation in conformity with technical specification, term & conditions in quotation documents are invited from registered Civil Job-Contractors for "Construction of Decorative Main Gate - Entrance" at Head Office (Campus), Bhubaneswar of Khordha District. Further details please visit our website [www.orissaagro.com](http://www.orissaagro.com). The detail tender documents will be available in the Head Office of undersigned from **dt.25.01.2019 to dt.02.02.2019 up to 1.00 p.m.** on payment of Rs.2000/-+ GST per set or else the documents can be downloaded from our website and the documents should be enclosed with a D.D. for Rs.2000/- +GST in favour of OAIC Ltd. of any nationalized bank payable at Bhubaneswar. The last date of submission of quotation document is **dt. 02.02.2019** up to 3.00 p.m. and will be opened on 4.00 p.m.. The undersigned reserves the right to accept / reject any / all application (s) without assigning any reasons thereof.

Sd/-

**PROJECT MANAGER(E&I)**



**INVITATIONS FOR BIDS (IFB)**

1. The Managing Director, OAIC, Bhubaneswar invites tenders from the registered Civil Job-Contractors for the work as detailed in the table below.

Sl. No.	Requisite Descriptions	"Construction of Decorative Main Gate"
1.	Estimated Cost.	
	<b>Construction of Decorative Main Gate</b>	Rs.333175.00
2.	EMD@2% of project cost	Rs.7000/-
3.	Cost of Bid Document.	Rs.2000/- + GST Per Set.
4.	Period of Completion.	45days (1months 15 days)
5.	Availability of Tender paper in OAIC-Bhubaneswar & in our website "www.orissaagro.com"	From <u>25.01.2019</u> to <u>02.02.2019</u> up to 13.00 Hours.
6.	Last Date & Time of receipt of Tender paper with all documents.	Up to 15.00 Hours of dt. <u>02.02.2019</u>
7.	Date & Time of opening of Tender Paper.	At 16.00 Hours of dt. <u>02.02.2019</u>

2. The bid document will be available in OAIC – Bhubaneswar on payment of cost as above-mentioned in shape of cash/DD on application by the bidder.
3. Bids received shall be opened by the Project Manager (E&I), OAIC, and Bhubaneswar in his office.
4. The packet super scribing for "Construction of Decorative Main Gate- Entrance" at Head Office (Campus), Bhubaneswar containing EMD & Cost of Bid Document (if downloaded from web site) in shape of Demand Draft drawn in favour of "Odisha Agro Industries Corporation" payable at Bhubaneswar, should reach Managing Director, OAIC, Bhubaneswar as specified above. The undersigned will not be held any way responsible for any kind of postal delay. Non- receipt of EMD, cost of Bid Document & self attested of other relevant documents as specified above within the stipulated date will lead to rejection of the Bid. The bidder who purchased the document from OAIC – Bhubaneswar need to attach the M.R. copy towards tender paper cost with the document.

5. Bidders are to submit only original BoQ attached with the original tender document uploaded by OAIC after entering the relevant fields without any alteration/deletion/modification. Multiple/ altered / partly altered BoQ submission shall lead to cancellation of Bid. BoQ to be signed by the bidder in each page.
6. The offer of the lowest bidder will generally be considered for work order. But the authority reserves the right to award work order to any bidder on due investigation as the situation may be.
7. The successful bidder has to go for a comprehensive agreement with OAIC before placement of work order regarding the technical and financial terms & conditions.
8. Even if qualification criteria are met the bidders can be disqualified for the following reasons
  - i) Making a false statement/ declaration
  - ii) Past record of poor performance
  - iii) Past record of abandoning works halfway or inordinate delay in completion of work
  - iv) Past history of litigations
9. The authority reserves right to cancel any or all Bids without assigning any reason thereof.
10. Any Dispute arising out of this will be subject to the Bhubaneswar jurisdiction only.

-Sd/-  
PROJECT MANAGER(E&I)

## BILL OF QUANTITIES

### ABSTRACT OF ESTIMATE FOR CONSTRUCTION OF DECORATIVE ENTRANCE GATE

S.No.	Items	Qty	Unit	Rate	Amount		
1	Dismantling brick masonry in cement mortar above 3m. height including stacking the useful materials for reuse and removing the debris within 50m. Lead etc. complete in all respect as per direction of EIC.	7.65	Cum	729.90	5580.42		
2	Dismantling and removing of M.S gate 2 nos and refixing etc. complete in all respect as per direction of EIC.	2.00	Nos	2500.00	5000.00		
3	Excavation of foundation in hard soil with 50 m initial lead and 1.5m initial lift including rough dressing and spreading outside foundation	8.78	Cum	117.05	1027.49		
4	Spreading sand in foundation and apron including watering and ramming etc. complete in all respect as per direction of EIC.	1.35	Cum	310.49	417.62		
5	Cement Concrete 1:4:8 using 40mm size HG crusher broken metal etc. complete in all respect as per direction of EIC.	1.35	Cum	3786.40	5092.85		
6	RCC M-20 grade using 20 mm and down grade black crusher broken hard granite chips including hoisting, laying, rigid and smooth centering and shuttering, transportation and royalties etc all complete as per direction of E.I.C.						
a)	Column Base	2.57	Cum	5040.46	12970.47		
b)	Column	2.04	Cum	8507.79	17345.64		
c)	Plinth Beam	0.85	Cum	5308.40	4509.47		
d)	Top Beam	1.87	Cum	8507.79	15900.17		
7	Supplying HYSD Bar reinforcement incl. cutting, bending, binding, laying & placing grills for RCC work including binding wire, centering & shuttering etc all complete etc. complete in all respect as per direction of EIC.						
a)	Column Base	272.66	Kgs				
b)	Column	360.05	Kgs				
c)	Plinth Beam	150.02	Kgs				
d)	Top Beam	330.05	Kgs				
		<b>1112.78</b>	<b>Kgs</b>	<b>11.13</b>	<b>Qti</b>	<b>6096.36</b>	<b>67839.17</b>

8	Fixing of Granite wall tiles in dados, skirting, risers of steps on 12mm thick cement plaster (1:3) joined with neat cement slurry mixed with pigments to match the colour of tile including rubbing, polishing all complete including cost of Vitrified tiles etc. complete in all respect as per direction of EIC.	31.62	Sqm	2125.11	67202.32
9	Supplying, making & fixing of Stainless steel letter of 4"x4" size over Granite Plates incl all material etc. complete in all respect as per direction of EIC.	604.00	S.Inch	85.00	51340.00
10	Supplying, Wiring & fixing of Street lamp(LED) for vision of Granited Gate etc. complete in all respect as per direction of EIC.	4.00	Nos	2500.00	10000.00
11	Supplying, making & fixing of M.5 Square Bar-1.5"size Gate including Priming and Painting etc. etc. complete in all respect as per direction of EIC.	1.00	Nos	L.5	50000.00
				Total-	314225.61
			GST @	12%	Rs. 37707.07
			Labor Cess @	1%	Rs. 3142.26
				Rs.	355074.94
				say Rs.	333175.00

My offer price is \_\_\_\_\_% less of the estimate cost.

Sign. of the Contractor

## PLAN & DRAWING SECTION

DESIGN OF THE DECORATIVE MAIN GATE







# PLAN & DIAGRAM

## CROSS SECTION OF COLUMN & BEAM (Entrance Main Gate)

COLUMN SIZE - 1.5' x 1.5'

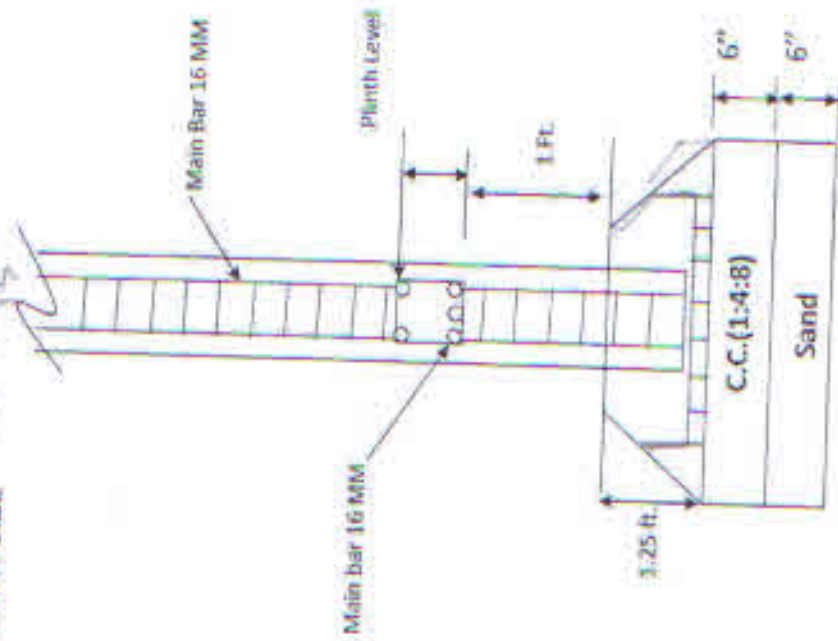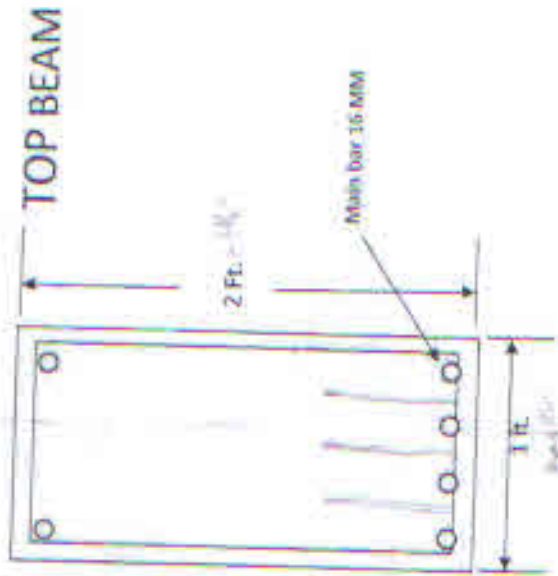

*Handwritten signature and date:*  
Date 11/18/18  
P. B. C. A. S.